



Electrical & Automation

POWERING A NON-STOP INDIA



**Maximum Retail Prices
For Final Distribution Products**
Effective from 15-08-26

EXORA

AT LAURITZ KNUDSEN, WE POWER A NON-STOP INDIA.

That's why we listen, we partner, and we innovate - to make technology and energy solutions accessible to every corner of India.

Born of this soil - we understand India's rhythm and resilience.

Therefore, **we create technology that speaks every language of progress.** From farms to factories, we empower every business, regardless of size, sector, or location, to thrive.


Because when technology reaches everyone, India moves forward as one.





Safety re-defined

Finger proof terminals eliminate chances of accidental contact with live part. You can install, operate and maintain modular device with total confidence.



Energy limiting class - 3

If fault occurs, the Rapid Arc Quenching mechanism in modular device operates and extinguishes the arc quickly (within 3-5 msec), ensuring lowest possible energy flow through the circuit. This minimize risk of fire and maximizes life of your equipment.



Safety meets superior aesthetics

Ergonomically designed, profiled for superior cooling and manufactured with fire retardant material. Modular device is brought to you keeping in mind utmost user safety.

Key Benefits



True contact indication

E&A modular device range enhances safety through true contact indication even from a distance regardless of its mounting and knob position. Red and Green indication tags provided below the knob positively identify the electrical ON/OFF status, reflecting actual contact status.



Integrated label holder

E&A MCB's are equipped with label holder for easy identification of circuit during operation as well as in maintenance.




Innovatively profiled breathing channels

When two or more poles are placed adjacent to each other, the breathing channels are so profiled that the air circulates around individual pole, resulting in cooler operation.




Large terminal size and Biconnect

Exora MCB's can easily accommodate cables of up to 35 sq.mm. Biconnect terminals offer convenience of connecting both cable and bus bar.




Two position DIN rail clip

Installation on a DIN rail is further simplified with a two-position DIN rail clip as a standard feature. E&A MCB range makes mounting on a standard DIN rail more convenient .



Non-welding contacts

Silver Graphite contact tips ensure higher life and maximum safety against contact welding due to its superior anti-welding properties, enhancing safety and life of the system.



Combihead screw

E&A modular devices with combihead screws, allow you to use standard as well as Philips head screw drivers. E&A modular device range addresses your undefined needs.



Miniature Circuit Breaker (MCB) [8536]

Range Highlights

- › True contact indication for individual pole
- › Label holder facility for all configurations
- › Conforms to IS/IEC 60898 - 10kA
- › Conforms to IS/IEC 60947 - 2
 - » 15kA C-curve till 40 A
 - » 10kA C-curve for 50A, 63A
- › Available in B, C & D curves
- › Low watt loss - almost 50% of the values prescribed by IS/IEC 60898
- › Trip free mechanism
- › Design based on advanced current limiting hammer trip mechanism
- › No Line-Load bias
- › Bi connect feature on both sides
- › Suitable for accessory fitment



Rating	Modules 1 Mod = 17.5 mm	B-Curve Cat. No.	M.R.P. (₹) Per Unit	C-Curve Cat. No.	M.R.P. (₹) Per Unit	D-Curve Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)							
0.5A	1	-	-	BB10E50C	640	BB10E50D	665
1A	1	-	-	BB10010C	640	BB10010D	665
2A	1	-	-	BB10020C	640	BB10020D	665
3A	1	-	-	BB10030C	640	BB10030D	665
4A	1	-	-	BB10040C	640	BB10040D	665
6A	1	BB10060B	377	BB10060C	377	BB10060D	545
10A	1	BB10100B	377	BB10100C	377	BB10100D	545
16A	1	BB10160B	377	BB10160C	377	BB10160D	545
20A	1	BB10200B	377	BB10200C	377	BB10200D	545
25A	1	BB10250B	377	BB10250C	377	BB10250D	545
32A	1	BB10320B	377	BB10320C	377	BB10320D	545
40A	1	BB10400B	940	BB10400C	940	BB10400D	960
50A	1	BB10500B	940	BB10500C	940	BB10500D*	960
63A	1	BB10630B	940	BB10630C	940	BB10630D*	960
Double Pole (DP)							
0.5A	2	-	-	BB20E50C	1870	BB20E50D	1905
1A	2	-	-	BB20010C	1870	BB20010D	1905
2A	2	-	-	BB20020C	1870	BB20020D	1905
3A	2	-	-	BB20030C	1870	BB20030D	1905
4A	2	-	-	BB20040C	1870	BB20040D	1905
6A	2	BB20060B	1305	BB20060C	1305	BB20060D	1385
10A	2	BB20100B	1305	BB20100C	1305	BB20100D	1385
16A	2	BB20160B	1305	BB20160C	1305	BB20160D	1385
20A	2	BB20200B	1305	BB20200C	1305	BB20200D	1385
25A	2	BB20250B	1305	BB20250C	1305	BB20250D	1385
32A	2	BB20320B	1305	BB20320C	1305	BB20320D	1385
40A	2	BB20400B	2125	BB20400C	2125	BB20400D	2260
50A	2	BB20500B	2125	BB20500C	2125	BB20500D*	2260
63A	2	BB20630B	2125	BB20630C	2125	BB20630D*	2260
Three Pole (TP)							
0.5A	3	-	-	BB30E50C	2725	BB30E50D	2765
1A	3	-	-	BB30010C	2725	BB30010D	2765
2A	3	-	-	BB30020C	2725	BB30020D	2765
3A	3	-	-	BB30030C	2725	BB30030D	2765
4A	3	-	-	BB30040C	2725	BB30040D	2765
6A	3	BB30060B	2055	BB30060C	2055	BB30060D	2205
10A	3	BB30100B	2055	BB30100C	2055	BB30100D	2205
16A	3	BB30160B	2055	BB30160C	2055	BB30160D	2205
20A	3	BB30200B	2055	BB30200C	2055	BB30200D	2205
25A	3	BB30250B	2055	BB30250C	2055	BB30250D	2205
32A	3	BB30320B	2055	BB30320C	2055	BB30320D	2205
40A	3	BB30400B	3200	BB30400C	3200	BB30400D	3415
50A	3	BB30500B	3200	BB30500C	3200	BB30500D*	3415
63A	3	BB30630B	3200	BB30630C	3200	BB30630D*	3415

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP - 6 Nos., TP - 4 Nos., FP - 3 Nos.

*For details, please contact nearest branch office

Miniature Circuit Breaker (MCB) [8536]



Rating	Modules 1 Mod = 17.5 mm	B-Curve Cat. No.	M.R.P. (₹) Per Unit	C-Curve Cat. No.	M.R.P. (₹) Per Unit	D-Curve Cat. No.	M.R.P. (₹) Per Unit
Four Pole (FP)							
0.5A	4	-	-	BB40E50C	3460	BB40E50D	3465
1A	4	-	-	BB40010C	3460	BB40010D	3465
2A	4	-	-	BB40020C	3460	BB40020D	3465
3A	4	-	-	BB40030C	3460	BB40030D	3465
4A	4	-	-	BB40040C	3460	BB40040D	3465
6A	4	BB40060B	2875	BB40060C	2875	BB40060D	3000
10A	4	BB40100B	2875	BB40100C	2875	BB40100D	3000
16A	4	BB40160B	2875	BB40160C	2875	BB40160D	3000
20A	4	BB40200B	2875	BB40200C	2875	BB40200D	3000
25A	4	BB40250B	2875	BB40250C	2875	BB40250D	3000
32A	4	BB40320B	2875	BB40320C	2875	BB40320D	3000
40A	4	BB40400B	4030	BB40400C	4030	BB40400D	4435
50A	4	BB40500B	4030	BB40500C	4030	BB40500D*	4435
63A	4	BB40630B	4030	BB40630C	4030	BB40630D*	4435

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP - 6 Nos., TP - 4 Nos., FP - 3 Nos.

*For details, please contact nearest branch office

MCBs (Miniature Circuit Breakers) : 80A-125A [8536]

Range Highlights

- › Short circuit Breaking Capacity - 15kA (IS/IEC 60947-2, EN 60947-2)
- › Suitable for Isolation
- › C & D Characteristics
- › Protection Degree - IP 20
- › Available in SP, DP, TP and FP
- › Availability of wide Range of Site Mountable Accessories



Rating	Modules 1 Mod = 17.5 mm	C Curve Cat. No.	M.R.P. (₹) Per Unit	D Curve Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)					
80A	1.5	AU15S10803C	3980	AU15S10803D	4530
100A	1.5	AU15S11003C	4460	AU15S11003D	5065
125A	1.5	AU15S11253C	4800	AU15S11253D	5475
Double Pole (DP)					
80A	3	AU15S20803C	8815	AU15S20803D	10035
100A	3	AU15S21003C	9400	AU15S21003D	10690
125A	3	AU15S21253C	10345	AU15S21253D	11760
Three Pole (TP)					
80A	4.5	AU15S30803C	13905	AU15S30803D	15835
100A	4.5	AU15S31003C	14835	AU15S31003D	16860
125A	4.5	AU15S31253C	16460	AU15S31253D	18705
Four Pole (FP)					
80A	6	AU15S40803C	18165	AU15S40803D	20630
100A	6	AU15S41003C	18895	AU15S41003D	21495
125A	6	AU15S41253C	21400	AU15S41253D	24320

**CERTIFIED TO LEAD,
TRUSTED FOR SAFETY.**

BIS-Certified HR MCBs Range - 80A, 100A & 125A



(AC MCB + DC MCB)



AC MCB^A with C-Curve

Description	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
1 AC 16A DP MCB ^A + 1 DC 16A DP 500V MCB	2+2	SC221616	2015
New 1 AC 20A DP MCB ^A + 1 DC 20A DP 500V MCB	2+2	SC222020	2015
New 1 AC 20A DP MCB ^A + 1 DC 25A DP 500V MCB	2+2	SC222025	2015
New 1 AC 20A DP MCB ^A + 1 DC 32A DP 500V MCB	2+2	SC222032	2015
1 AC 25A DP MCB ^A + 1 DC 16A DP 500V MCB	2+2	SC222516	2015
New 1 AC 25A DP MCB ^A + 1 DC 25A DP 500V MCB	2+2	SC222525	2015
1 AC 32A DP MCB ^A + 1 DC 16A DP 500V MCB	2+2	SC223216	2015
New 1 AC 32A DP MCB ^A + 1 DC 25A DP 500V MCB	2+2	SC223225	2015
1 AC 32A DP MCB ^A + 1 DC 32A DP 500V MCB	2+2	SC223232	2015

Double the Protection, Twice the Power!

Complete Protection for Solar Rooftop Installations

DC MCB:
10kA as per IEC 60947-2

AC MCB:
10kA as per IS/IEC 60898-1



Miniature Circuit Breaker (MCB) [8536]

DC MCBs as per IEC 60947-2 [8536]

Rated Voltage:
Breaking capacity of 6 kA - BB Series DC MCBs

130V DC SP MCB



Rating	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)			
0.5A	1	BB10E5DC	910
1A	1	BB1001DC	910
2A	1	BB1002DC	910
3A	1	BB1003DC	910
4A	1	BB1004DC	910
6A	1	BB1006DC	790
10A	1	BB1010DC	790
16A	1	BB1016DC	790
20A	1	BB1020DC	790
25A	1	BB1025DC	790
32A	1	BB1032DC	790
40A	1	BB1040DC	1040
50A	1	BB1050DC	1040
63A	1	BB1063DC	1040

Rated Voltage:
Breaking capacity of BJ Series DC MCBs
» 10kA till 40 A
» 6kA for 50A, 63A

250V DC SP MCB

Rating	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
Single Pole (SP)			
0.5A	1	BJ10E5DC	1070
1A	1	BJ1001DC	1070
2A	1	BJ1002DC	1070
3A	1	BJ1003DC	1070
4A	1	BJ1004DC	1070
6A	1	BJ1006DC	875
10A	1	BJ1010DC	875
16A	1	BJ1016DC	875
20A	1	BJ1020DC	875
25A	1	BJ1025DC	875
32A	1	BJ1032DC	875
40A	1	BJ1040DC	1210
50A	1	BJ1050DC	1210
63A	1	BJ1063DC	1210

New

250V DC DP MCB



Rating	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
0.5A	2	BB20E5DC	1950
1A	2	BB2001DC	1950
2A	2	BB2002DC	1950
3A	2	BB2003DC	1950
4A	2	BB2004DC	1950
6A	2	BB2006DC	1715
10A	2	BB2010DC	1715
16A	2	BB2016DC	1715
20A	2	BB2020DC	1715
25A	2	BB2025DC	1715
32A	2	BB2032DC	1715
40A	2	BB2040DC	2320
50A	2	BB2050DC	2320
63A	2	BB2063DC	2320

500V DC DP MCB

Rating	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
0.5A	2	BJ20E5DC	2230
1A	2	BJ2001DC	2230
2A	2	BJ2002DC	2230
3A	2	BJ2003DC	2230
4A	2	BJ2004DC	2230
6A	2	BJ2006DC	1885
10A	2	BJ2010DC	1885
16A	2	BJ2016DC	1885
20A	2	BJ2020DC	1885
25A	2	BJ2025DC	1885
32A	2	BJ2032DC	1885
40A	2	BJ2040DC	2400
50A	2	BJ2050DC	2400
63A	2	BJ2063DC	2400

New

Note: Standard Pack Quantity for MCB : SP - 12 Nos., DP - 6 Nos.

1000V DC MCBs [8536]

Rated Voltage: 1000V DC
with breaking capacity of 6 kA - BK Series DC MCBs

New



Description	Modules 1 Mod = 17.5mm	Cat. No.	M.R.P. (₹) Per Unit
DP 6A 1000V DC 6kA MCB	4	BK2006DC	2875
DP 10A 1000V DC 6kA MCB	4	BK2010DC	2875
DP 16A 1000V DC 6kA MCB	4	BK2016DC	2875
DP 20A 1000V DC 6kA MCB	4	BK2020DC	2875
DP 25A 1000V DC 6kA MCB	4	BK2025DC	2875
DP 32A 1000V DC 6kA MCB	4	BK2032DC	2875
DP 40A 1000V DC 6kA MCB	4	BK2040DC	3495
DP 50A 1000V DC 6kA MCB	4	BK2050DC	3495
DP 63A 1000V DC 6kA MCB	4	BK2063DC	3495

Isolators [8536]



Range Highlights

- › Conforms to IEC 60947-3
- › Utilization category AC-22A
- › Available in DP, TP and FP versions in 40A, 63A, 80A & 100A ratings

Rating	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Double Pole (DP)				Three Pole (TP)		Four Pole (FP)			
40A	2	BF204000	915	3	BF304000	1585	4	BF404000	2030
63A	2	BF206300	1160	3	BF306300	1825	4	BF406300	2125
80A	2	BF208000	1480	3	BF308000	2000	4	BF408000	2375
100A	2	BF210000	1550	3	BF310000	2135	4	BF410000	2570

Note: Standard Pack Quantity for Isolator : DP - 6 Nos., TP - 4 Nos., FP - 3 Nos.

RCCB (Residual Current Circuit Breaker) [8536]

Range Highlights

- › Conforms to IS 12640 (Part 1) / IEC 61008-1
- › RCCBs are available in DP and FP versions from 25 to 100A ratings with 30 mA, 100 mA and 300mA sensitivity



- › Truly current operated - operation even at nominal Voltage
- › Operates on Core Balance Current Transformer (CBCT) principle
- › Advanced neutral mechanism

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Double Pole (DP)				
25A	30 mA	2	BG202503	4180
	100 mA	2	BG202510	4685
	300 mA	2	BG202530	4685
32A	30 mA	2	BG203203	4780
	100 mA	2	BG203210	5355
	300 mA	2	BG203230	5355
40A	30 mA	2	BG204003	4780
	100 mA	2	BG204010	5355
	300 mA	2	BG204030	5355
63A	30 mA	2	BG206303	5960
	100 mA	2	BG206310	6455
	300 mA	2	BG206330	6455
100A	30 mA	2	BG210003	10705
	100 mA	2	BG210010	11245
	300 mA	2	BG210030	11245

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Four Pole (FP)				
25A	30 mA	4	BG402503	5860
	100 mA	4	BG402510	6135
	300 mA	4	BG402530	6135
32A	30 mA	4	BG403203	5920
	100 mA	4	BG403210	6240
	300 mA	4	BG403230	6240
40A	30 mA	4	BG404003	5920
	100 mA	4	BG404010	6240
	300 mA	4	BG404030	6240
63A	30 mA	4	BG406303	6690
	100 mA	4	BG406310	7155
	300 mA	4	BG406330	7155
100A	30 mA	4	BG410003	11665
	100 mA	4	BG410010	12095
	300 mA	4	BG410030	12095

RCCBs (Residual Current Circuit Breakers) : Type-Adi (with Added immunity) [8536]



Range Highlights

- › Wide Range of Current Ratings - 25A to 100A
- › Precise Sensitivities for variety of applications - from 30mA to 300mA
- › 2P & 4P versions
- › Suitable for Isolation
- › Protection Degree - IP 20
- › Availability of wide Range of Site Mountable Accessories
- › Type Adi: Suitable for AC + Pulsating DC (Type A) + Harmonics

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P Adi				
25A	30mA	2	AURAD202503	7945
	100mA	2	AURAD202510	8310
	300mA	2	AURAD202530	8310
40A	30mA	2	AURAD204003	8430
	100mA	2	AURAD204010	8565
	300mA	2	AURAD204030	8565
63A	30mA	2	AURAD206303	9860
	100mA	2	AURAD206310	10050
	300mA	2	AURAD206330	10050
100A	30mA	2	AURAD210003	14570

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
4P Adi				
25A	30mA	4	AURAD402503	9605
	100mA	4	AURAD402510	9785
	300mA	4	AURAD402530	9785
40A	30mA	4	AURAD404003	9975
	100mA	4	AURAD404010	10130
	300mA	4	AURAD404030	10130
63A	30mA	4	AURAD406303	10860
	100mA	4	AURAD406310	11085
	300mA	4	AURAD406330	11085
100A	30mA	4	AURAD410003	17300
	300mA	4	AURAD410030	17300

All-Rounder RCDs (RCCB & RCBO)

Specially designed Adi RCDs ensure Safe and Reliable protection
for All Applications in AC networks with Pulsating DC along with Harmonics



Added Immunity

RCBOs (Residual Current Breaker with Overcurrent Protection) [8536]

Range Highlights*

- › Conforms to IEC 61009-1, IS 12640-2, EN 61009-1
- › Short circuit Breaking Capacity - 10kA
- › Precise Sensitivities for a variety of applications
 - » from 10mA to 300mA
- › Suitable for Isolation

Type-AC

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P AC*				
6A	10mA	2	AUF3C200601	7115
	30mA	2	AUF3C200603	7115
	100mA	2	AUF3C200610	7260
	300mA	2	AUF3C200630	7345
10A	10mA	2	AUF3C201001	7115
	30mA	2	AUF3C201003	7115
	100mA	2	AUF3C201010	7260
	300mA	2	AUF3C201030	7345
16A	10mA	2	AUF3C201601	7115
	30mA	2	AUF3C201603	7115
	100mA	2	AUF3C201610	7260
	300mA	2	AUF3C201630	7345
20A	30mA	2	AUF3C202003	7115
	100mA	2	AUF3C202010	7260
	300mA	2	AUF3C202030	7345
25A	30mA	2	AUF3C202503	7115
	100mA	2	AUF3C202510	7260
	300mA	2	AUF3C202530	7345
32A	30mA	2	AUF3C203203	7115
	100mA	2	AUF3C203210	7260
	300mA	2	AUF3C203230	7345
40A	30mA	2	AUF3C204003	7115
	100mA	2	AUF3C204010	7260
	300mA	2	AUF3C204030	7345
63A	30mA	4	AUF3C206303	8610
	100mA	4	AUF3C206310	9130
	300mA	4	AUF3C206330	9200
4P AC				
16A	30mA	7.5	AUF3C401603	7780
	100mA	7.5	AUF3C401610	8660
	300mA	7.5	AUF3C401630	8835
20A	30mA	7.5	AUF3C402003	7780
	100mA	7.5	AUF3C402010	8660
	300mA	7.5	AUF3C402030	8835
25A	30mA	7.5	AUF3C402503	7780
	100mA	7.5	AUF3C402510	8660
	300mA	7.5	AUF3C402530	8835
32A	30mA	7.5	AUF3C403203	8035
	100mA	7.5	AUF3C403210	8665
	300mA	7.5	AUF3C403230	8860
40A	30mA	7.5	AUF3C404003	8160
	100mA	7.5	AUF3C404010	8665
	300mA	7.5	AUF3C404030	8890
63A	30mA	7.5	AUF3C406303	9780
	100mA	7.5	AUF3C406310	9965
	300mA	7.5	AUF3C406330	9965
80A	30mA	12	AUF3C408003	37895
	100mA	12	AUF3C408010	38745
	300mA	12	AUF3C408030	38745
100A	30mA	12	AUF3C410003	40515
	100mA	12	AUF3C410010	41485
	300mA	12	AUF3C410030	41485

*For 2P AC/Adi D Curve RCBO, please contact nearest branch office



- › Availability of wide Range of Site Mountable Accessories
- › Available in
 - » Type AC: For standard AC installations
 - » Type Adi: Suitable for AC + Pulsating DC (Type A) + Harmonics

Type-Adi

Rating	Sensitivity	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
2P Adi				
6A	30mA	2	AUF3D200603	9600
	100mA	2	AUF3D200610	10575
	300mA	2	AUF3D200630	10970
10A	30mA	2	AUF3D201003	9600
	100mA	2	AUF3D201010	10575
	300mA	2	AUF3D201030	10970
16A	30mA	2	AUF3D201603	9600
	100mA	2	AUF3D201610	10575
	300mA	2	AUF3D201630	10970
20A	30mA	2	AUF3D202003	9600
	100mA	2	AUF3D202010	10575
	300mA	2	AUF3D202030	10970
25A	30mA	2	AUF3D202503	9600
	100mA	2	AUF3D202510	10575
	300mA	2	AUF3D202530	10970
32A	30mA	2	AUF3D203203	9600
	100mA	2	AUF3D203210	10575
	300mA	2	AUF3D203230	10970
40A	30mA	2	AUF3D204003	9600
	100mA	2	AUF3D204010	10575
	300mA	2	AUF3D204030	10970
63A	30mA	4	AUF3D206303	11315
	100mA	4	AUF3D206310	11965
	300mA	4	AUF3D206330	12075
4P Adi				
16A	30mA	7.5	AUF3D401603	10220
	100mA	7.5	AUF3D401610	11365
	300mA	7.5	AUF3D401630	11600
20A	30mA	7.5	AUF3D402003	10220
	100mA	7.5	AUF3D402010	11365
	300mA	7.5	AUF3D402030	11600
25A	30mA	7.5	AUF3D402503	10220
	100mA	7.5	AUF3D402510	11365
	300mA	7.5	AUF3D402530	11600
32A	30mA	7.5	AUF3D403203	10545
	100mA	7.5	AUF3D403210	11380
	300mA	7.5	AUF3D403230	11615
40A	30mA	7.5	AUF3D404003	10710
	100mA	7.5	AUF3D404010	11380
	300mA	7.5	AUF3D404030	11665
63A	30mA	7.5	AUF3D406303	12830
	100mA	7.5	AUF3D406310	13090
	300mA	7.5	AUF3D406330	13090
80A	30mA	12	AUF3D408003	37895
	100mA	12	AUF3D408010	38745
	300mA	12	AUF3D408030	38745
100A	30mA	12	AUF3D410003	40515
	100mA	12	AUF3D410010	41485
	300mA	12	AUF3D410030	41485

*For technical details, please contact nearest branch office

SPDs (Surge Protection Devices) [8536]



New

Range Highlights

- › Conforms to IEC 61643-11
- › Available in Type 2 and Type 1+2
- › Type 2 : Protection against indirect lightning and switching surges
 - » Maximum Discharge Current - I_{max} up to 70kA
- › Type 1+2 : Protection against direct and indirect lightning surges
 - » Maximum Discharge Current - I_{max} up to 100kA

800V Solar Application

Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage (Uc)	Cat. No.	M.R.P. (₹) Per Unit
Type 2, I _{max} 40kA	3P	4	1500	AUSP023P40-1500	17250
Type 1+2, I _{imp} 12.5kA	3P	5	1360	AUSP123P50-1360	51750
Type 1+2, I _{imp} 12.5kA	3P	4	880	AUSP123P50-880	35500

440V Application (Common + Differential Mode)

Description	I _{max}	Configuration	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Type 1+2, I _{imp} 12.5kA	50kA	1P+N	2	AUSP121PN50D	13750
		3P+N	4	AUSP123PN50D	26335
Type 2	40kA	1P+N	1	AUSP021PN40D	8595
		3P+N	2	AUSP023PN40D	17175
Type 2	15kA	1P+N	1	AUSP021PN15D	6875
		3P+N	2	AUSP023PN15D	13525
Type 1+2, I _{imp} 8kA	100kA	1P+N	2	AUSP121PN100D	12360
		3P+N	4	AUSP123PN100D	24290
Type 2	70kA	1P+N	2	AUSP021PN70D	13500
		3P+N	4	AUSP023PN70D	22485

SPD Cartridges

Description	Cat. No.	M.R.P. (₹) Per Unit
Cartridge for AUSP021PN15D	AUSC021PN15D	3550
Cartridge for AUSP021PN40D	AUSC021PN40D	4420
Cartridge for AUSP021PN70D / AUSP023PN70D	AUSC021PN70D	4725
Cartridge for AUSP023PN15D [#]	AUSC023PN15D	4640
Cartridge for AUSP023PN40D [#]	AUSC023PN40D	5900
Cartridge for AUSP121PN100D / AUSP123PN100D	AUSC121PN100D	7080
Cartridge for AUSP121PN50D / AUSP123PN50D	AUSC121PN50D	7645
Cartridge for AUSP023PN15D [#]	AUSC023PN15DG	5390
Cartridge for AUSP023PN40D [#]	AUSC023PN40DG	5625

[#]For technical details, please contact nearest branch office

ACCL (Automatic Changeover with Current Limiter) [8536]

Single Phase ACCL



Range Highlights

- › Conforms to IEC 60947-6, IEC 60947-3
- › Wide Range of Current Ratings
 - » (Generator side) - 1A to 30A
 - » (Electricity Board side) - 30A
- › RoHS compliant

Description EB/DG	Modules 1 Mod = 17.5 mm	CAT Nos.	M.R.P. (₹) Per Unit
30A/1A	4	AUCL01030001	3200
30A/1.5A	4	AUCL010301E5	3200
30A/2A	4	AUCL01030002	3200
30A/2.5A	4	AUCL010302E5	3200
30A/3A	4	AUCL01030003	3200
30A/4A	4	AUCL01030004	3200
30A/5A	4	AUCL01030005	3200
30A/6A	4	AUCL01030006	3200
30A/8A	4	AUCL01030008	3200
30A/10A	4	AUCL01030010	3200
30A/12A	4	AUCL01030012	3200
30A/15A	4	AUCL01030015	3200
30A/20A	4	AUCL01030020	3200
30A/30A	4	AUCL01030030*	3200

*Non-current limiting variant

Three Phase ACCL



Range Highlights

- › Settable overload current limit at DG side
- › Separate power consumption monitoring for Mains & Genset
- › Settable overvoltage & undervoltage protection
- › Settable TPN or SPN mode at DG side
- › Protection against single phasing

Description (AC-1) EB/DG	Cat. No.	M.R.P. (₹) Per Unit
32A / 32A	AUCL03032032	22095
40A / 32A	AUCL03040032	22771
40A / 40A	AUCL03040040	24645
50A / 50A	AUCL03050050	35128
63A / 50A	AUCL03063050	38761
63A / 63A	AUCL03063063	43907
80A / 80A	AUCL03080080	66916
125A / 125A	AUCL03125125	112643

For 3 Phase ACCL programming video
please scan the QR code or click here



Changeover Switches [8536]



Range Highlights

- › Conforms to IEC 60947-3 and IS/IEC 60947-3
- › Available in 3 positions (I-O-II) with centre off position
- › Utilization category AC-22A

Rating	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Double Pole			
25A	2	AUC00202500	2610
40A	2	AUC00204000	3995
63A	3	AUC00206300	4645
Four Pole			
40A	4	AUC00404000	6885
63A	6	AUC00406300	7805

Accessories

Accessories [8538]



All Half Module and One Module Accessories are common for AU MCBs, RCCBs and RCBs

Description	Configuration	Modules 1 Mod = 17.5 mm	Voltage	CAT Nos.	M.R.P. (₹) Per Unit
Auxiliary Contact	1NO+1NC	0.5	240V AC, 24V DC	AUAXAC240	1380
AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	AUATAC240	1615
HR AUX/TAC*	1NO+1NC	0.5	240V AC, 24V DC	AUATAC240HR	1615
Undervoltage Release	-	1	240V AC	AUUVAC240	3260
Release	-	1	24V DC	AUUVDC024	3260
Overvoltage Release	-	1	240V AC	AUOVAC240	4030
Shunt Release	-	1	240V AC	AUSRAC240	3740
	-	1	24V DC	AUSRDC024	3740
Padlock-Suitable for Lock Hasp 3.5 - 5 mm dia. max	Suitable for 1Pole=1Mod devices: RCCBs, RCBs, Changeover Switches up to 40A			AUPD01	735
	Suitable for 1Pole-1.5Mod devices: MCBs 80A-125A, Changeover Switch 63A			AUPD02	830

Note: Standard Pack Quantity for Padlock - 2 Nos.

*For 80A-125A MCBs please contact nearest branch office

Control & Monitoring Devices

Modular Contactors [8536]



Range Highlights

- › Wide Range of Current Ratings:
 - » 25A, 40A and 63A
- › Conforms to :
 - » IEC 61095, EN 61095
 - » IEC 60947-4-1, EN 60947-4-1
 - » IEC 60947-5-1
- › Protection Degree IP 20

Description (AC-1)	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
25A-1NO	1	AUMC1002501	2800
25A-2NO	1	AUMC2002501	3515
40A-2NO	3	AUMC2004003	6010
40A-3NO	3	AUMC3004003	8615
40A-4NO	3	AUMC4004003	10105
63A-2NO+2NC	3	AUMC2206303	10680
63A-3NO	3	AUMC3006303	10945
63A-4NO	3	AUMC4006303	12050

Accessory [8538]

Auxiliary Contact, 2NO	0.5	AUMCAUX240	2620
------------------------	-----	------------	------

Energy Meters [9030]



Range Highlights

- › DIN mounting whole current operated meter
- › Accuracy Class 1.0
- › Inbuilt RS485 option
- › **Parameters :** Voltage, Current, kW, kWh, kVA, kVAh, RPM, Load hours, Interruptions


Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
Single Phase - 60A	2	WD4010100000	3940
Three Phase - 80A	5	WD4020100000	8530
Single Phase - 60A (RS485)	2	WD4010110000	5825
Three Phase - 80A (RS485)	5	WD4020110000	12870

Indicating Lights [8531]



Description	Modules 1 Mod = 17.5 mm	Cat. No.	M.R.P. (₹) Per Unit
RED	1	AUIL01RED00	1610
YELLOW	1	AUIL01YEL00	1610
BLUE	1	AUIL01BLU00	1610
GREEN	1	AUIL01GRE00	1610
RED-YELLOW-BLUE	1	AUIL01RYB00	1960

Auxiliary & Accessories for Exora MCBs [8538]



Description	Cat. No.	M.R.P. (₹) Per Unit
Auxiliary Contact - 6A , 240V AC, (1NO+1NC), 0.5 Mod	BZA11006	1325
Shunt Release - 240V AC, 1 Mod	BZS00240	3625
Trip Alarm Contact - 6A, 240V AC, (1NO+1NC), 0.5 Mod	BZT11006	1545

Plugs



Highlights

- › Conforms to IEC 60309 -1&2
- › Mechanical Impact - IK08
- › Ingress Protection - IP44 & IP67
- › Fire Resistance - 850°C as per IEC 60695-2-11
- › Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Plug - IP44		
16A, 2P+E	PSKPM30164	700
32A, 2P+E	PSKPM30324	1105
16A, 3P+E	PSKPM40164	895
32A, 3P+E	PSKPM40324	1305
16A, 3P+N+E	PSKPM50164	945
32A, 3P+N+E	PSKPM50324	1260
Plug - IP67		
16A, 2P + E	PSKPM30167	1560
32A, 2P + E	PSKPM30327	2200
63A, 2P + E	PSKPM30637	6250
16A, 3P + E	PSKPM40167	1760
32A, 3P + E	PSKPM40327	2785
63A, 3P + E	PSKPM40637	5950
16A, 3P + N + F	PSKPM50167	1885
32A, 3P + N + E	PSKPM50327	2400
63A, 3P + N + E	PSKPM50637	5965
125A, 3P + N + E	PSKPM51257	18215

Socket



Highlights

- › Conforms to IEC 60309 -1&2
- › Mechanical Impact - IK08
- › Ingress Protection - IP44 & IP67
- › Fire Resistance - 850°C as per IEC 60695-211
- › Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Socket - IP44		
16A, 2P+E	PSKSM30164	970
32A, 2P+E	PSKSM30324	1355
16A, 3P+E	PSKSM40164	1140
16A, 3P + N + E	PSKSM50164	1240
32A, 3P + N + E	PSKSM50324	1660
Socket - IP67		
16A, 2P+E	PSKSM30167	1830
32A, 2P+E	PSKSM30327	2515
63A, 2P+E	PSKSM30637	6800
16A, 3P+E	PSKSM40167	2295
63A, 3P+E	PSKSM40637	6865
16A, 3P + N + E	PSKSM50167	2400
32A, 3P + N + E	PSKSM50327	2805
63A, 3P + N + E	PSKSM50637	6975
125A, 3P + N + E	PSKSM51257	21895

Socket Angled



Highlights

- › Conforms to IEC 60309 -1&2
- › Mechanical Impact - IK08
- › Ingress Protection - IP44 & IP67
- › Fire Resistance - 850°C as per IEC 60695-2-11
- › Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Socket Angled - IP44		
16A, 2P+E	PSKSA30164	755
32A, 2P+E	PSKSA30324	1335
16A, 3P+E	PSKSA40164	1140
32A, 3P+E	PSKSA40324	1575
16A, 3P+N+E	PSKSA50164	1215
32A, 3P+N+E	PSKSA50324	1540
Socket Angled - IP67		
16A, 2P+E	PSKSA30167	1440
32A, 2P+E	PSKSA30327	1875
63A, 2P+E	PSKSA30637	6140
32A, 3P+E	PSKSA40327	2785
63A, 3P+E	PSKSA40637	6150
32A, 3P+N+E	PSKSA50327	2220
63A, 3P+N+E	PSKSA50637	6275
125A, 3P+N+E	PSKSA51257	20820

Socket Straight



Highlights

- › Conforms to IEC 60309 -1&2
- › Mechanical Impact - IK08
- › Ingress Protection - IP44 & IP67
- › Fire Resistance - 850°C as per IEC 60695-2-11
- › Easy Screw connection with same orientation of clamp screws

Description	Cat NO	M.R.P. (₹) Per Unit
Socket Straight- IP44		
16A, 2P+E	PSKSS30164	860
32A, 2P+E	PSKSS30324	1370
32A, 3P+N+E	PSKSS50324	1715
Socket Straight- IP67		
16A, 2P+E	PSKSS30167	1450
63A, 2P+E	PSKSS30637	7435
63A, 3P+E	PSKSS40637	6210
63A, 3P+N+E	PSKSS50637	6210
125A, 3P+N+E	PSKSS51257	20820

Distribution Board suitable for Aluminum shuttering (Mivan) Construction



DBs suitable for Aluminum Shuttering Construction [8537]

SPN DBs

Highlights

- › Available in CRCA sheet steel, RAL9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bar | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification label
- › With provision for DP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer + Outgoing			
IP 43 - Metal Door				
4 way	2	2	LTSD04M	*
6 way	2	4	LTSD06M	*
8 way	2	6	LTSD08M	*
12 way	2	10	LTSD12M	*
16 way	2	14	LTSD16M	*

TPN DBs

Highlights

- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer + Outgoing			
IP 43 - Metal Door				
4 way	8	4+4+4	LTTD04M	*
6 way	8	6+6+6	LTTD06M	*
8 way	8	8+8+8	LTTD08M	*

* For details, please contact nearest branch office

DESIGN OR SAFETY?

OBVIOUSLY BOTH. OBVIOUSLY EXORA.N DB.

#ExoraHaiTohSafeHai



©2026. ALL RIGHTS RESERVED

Highlights


- › Conforms to IEC 61439-1 & 3
- › IK 08-for single door DBs, IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bar | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification label
- › With provision for DP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer + Outgoing			
IP 30 - Single Door				
4 way	2	2	DESPN004SDS	2175
6 way	2	4	DESPN006SDS	2275
8 way	2	6	DESPN008SDS	2620
12 way	2	10	DESPN012SDS	3110
16 way	2	14	DESPN016SDS	3810
18 way	2	16	DESPN018SDS	4430
IP 43 - Metal Door				
4 way	2	2	DESPN004DDS	2815
6 way	2	4	DESPN006DDS	3245
8 way	2	6	DESPN008DDS	3435
12 way	2	10	DESPN012DDS	4125
16 way	2	14	DESPN016DDS	5265
18 way	2	16	DESPN018DDS	5515
IP 43 - Glazed Door				
4 way	2	2	DESPN004GDS	3770
6 way	2	4	DESPN006GDS	4010
8 way	2	6	DESPN008GDS	4360
12 way	2	10	DESPN012GDS	5310
16 way	2	14	DESPN016GDS	6595
18 way	2	16	DESPN018GDS	6975
IP 54 - Metal Door				
4 way	2	2	DESPN00454S	9915
6 way	2	4	DESPN00654S	11055
8 way	2	6	DESPN00854S	11755
12 way	2	10	DESPN01254S	13500
16 way	2	14	DESPN01654S	15030
18 way	2	16	DESPN01854S	15365

Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 08-for single door DBs, IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SPMCBs as outgoing

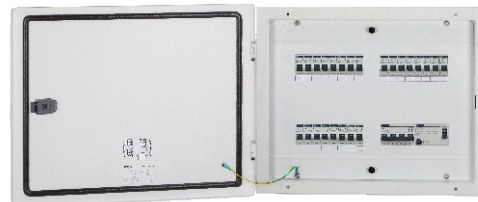

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 30 - Single Door				
4 way	4	4+4+4	DETPE004SDS	5630
6 way	4	6+6+6	DETPE006SDS	6910
4 way	8	4+4+4	DETPN004SDS	5925
6 way	8	6+6+6	DETPN006SDS	7340
8 way	8	8+8+8	DETPN008SDS	8655
12 way	8	12+12+12	DETPN012SDS	12475
16 way	8	16+16+16	DETPN016SDS	15210
IP 43 - Metal Door				
4 way	4	4+4+4	DETPE004DDS	6615
6 way	4	6+6+6	DETPE006DDS	8220
4 way	8	4+4+4	DETPN004DDS	6855
6 way	8	6+6+6	DETPN006DDS	8540
8 way	8	8+8+8	DETPN008DDS	10300
12 way	8	12+12+12	DETPN012DDS	15430
16 way	8	16+16+16	DETPN016DDS	19150
IP 43 - Glazed Door				
4 way	4	4+4+4	DETPE004GDS	8985
6 way	4	6+6+6	DETPE006GDS	10800
4 way	8	4+4+4	DETPN004GDS	9350
6 way	8	6+6+6	DETPN006GDS	11380
8 way	8	8+8+8	DETPN008GDS	13495
12 way	8	12+12+12	DETPN012GDS	20700
16 way	8	16+16+16	DETPN016GDS	24880
IP 54 - Metal Door				
4 way	4	4+4+4	DETPE00454S	22445
6 way	4	6+6+6	DETPE00654S	26230
4 way	8	4+4+4	DETPN00454S	23720
6 way	8	6+6+6	DETPN00654S	28565
8 way	8	8+8+8	DETPN00854S	31225
12 way	8	12+12+12	DETPN01254S	44015
16 way	8	16+16+16	DETPN01654S	52820

For ordering old DBs, replace Cat no with "DB" instead of "DE".

Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for FP MCB / Isolator / RCCB / RCBO as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



Horizontal PPI DBs

IP 43 - Metal Door

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
4 way	8	2+2+2	4+4+4	DEHPI004DD	12305
6 way	8	2+2+2	6+6+6	DEHPI006DD	14570
8 way	8	2+2+2	8+8+8	DEHPI008DD	17470
12 way	8	2+2+2	12+12+12	DEHPI012DD	24075
16 way	8	2+2+2	16+16+16	DEHPI016DD	28885



Tier PPI DBs

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
6 way	8	2+2+2	6+6+6	DETP1006DD	15080
8 way	8	2+2+2	8+8+8	DETP1008DD	18905
10 way	8	2+2+2	10+10+10	DETP1010DD	19815
12 way	8	2+2+2	12+12+12	DETP1012DD	20995
16 way	8	2+2+2	16+16+16	DETP1016DD	23935
12 way	MCCB [*]	2+2+2	12+12+12	DETPL012DD	22455

*Suitable for 3 Pole & 4 Pole DU100H, DU100D, DN0-100D & DN0-100C MCCB as incomer

Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with 100A insulated phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for
 - » Modular Incomer - FP MCB/Isolator/RCCB/RCBO as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing
 - » MCCB Incomer - MCCB* as incomer, DP RCCB/RCBO as sub-incomer and SP MCBs as outgoing



With Modular Incomer

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
4 way	8	4+4+4	4+4+4	DEPSG004DD	18070
6 way	8	4+4+4	6+6+6	DEPSG006DD	20375
8 way	8	4+4+4	8+8+8	DEPSG008DD	22735
12 way	8	4+4+4	12+12+12	DEPSG012DD	28205



With MCCB Incomer

Description	No. of Modules			Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer*	Sub-Incomer	Outgoing		
IP 43 - Metal Door					
4 way	MCCB	4+4+4	4+4+4	DEPGL004DD	24860
6 way	MCCB	4+4+4	6+6+6	DEPGL006DD	28425
8 way	MCCB	4+4+4	8+8+8	DEPGL008DD	32875
12 way	MCCB	4+4+4	12+12+12	DEPGL012DD	37075

*Suitable for 3 Pole & 4 Pole DU100H, DU100D, DN0-100D & DN0-100C MCCB as incomer

Vertical TPN DB with MCCB Incomer [8537]



Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with insulated vertical phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for 3 pole and 4 Pole MCCB* as incomer and SP/TP MCBs as outgoing



Up to 125A MCCB Incomer

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer*	Outgoing		
IP 43 - Metal Door				
4 way	MCCB	4+4+4	DEVTL004DD	20550
6 way	MCCB	6+6+6	DEVTL006DD	23355
8 way	MCCB	8+8+8	DEVTL008DD	25710
12 way	MCCB	12+12+12	DEVTL012DD	34980
16 way	MCCB	16+16+16	DEVTL016DD	42115
IP 54 - Metal Door				
4 way	MCCB	4+4+4	DEVTL00454	42960
6 way	MCCB	6+6+6	DEVTL00654	48990
8 way	MCCB	8+8+8	DEVTL00854	53035

*Suitable for 3 Pole & 4 Pole DZO MCCB as incomer.
In case of any other MCCB frame requirement please contact nearest branch.

Vertical TPN DB with Modular Incomer [8537]



Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - Provided with insulated vertical phase bus-bars | neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | color-coded interconnecting wire set | cable ties | blanking plates and circuit identification labels
- › With provision for FP MCB/Isolator/RCCB/RCBO as incomer and SP/ TP MCBs as outgoing



Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 43 - Metal Door				
4 way	8	4+4+4	DEVTM004DD	17375
6 way	8	6+6+6	DEVTM006DD	19355
8 way	8	8+8+8	DEVTM008DD	22470
12 way	8	12+12+12	DEVTM012DD	30590
16 way	8	16+16+16	DEVTM016DD	36500
IP 54 - Metal Door				
4 way	8	4+4+4	DEVTM00454	37075
6 way	8	6+6+6	DEVTM00654	40445
8 way	8	8+8+8	DEVTM00854	44665

Vertical TPN DB with MCCB Incomer [8537]



Up to 250A MCCB Incomer

Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer*	Outgoing		
IP 43 - Metal Door				
4 way	MCCB	4+4+4	DEVTH004DD	26825
6 way	MCCB	6+6+6	DEVTH006DD	30040
8 way	MCCB	8+8+8	DEVTH008DD	33040
12 way	MCCB	12+12+12	DEVTH012DD	39985
16 way	MCCB	16+16+16	DEVTH016DD	53735
IP 54 - Metal Door				
4 way	MCCB	4+4+4	DEVTH00454	49080
6 way	MCCB	6+6+6	DEVTH00654	53585
8 way	MCCB	8+8+8	DEVTH00854	55420

*Suitable for 3 pole and 4 pole DU250, DU250C & DN1 MCCB as incomer

Flexi/Row DB [8537]



Highlights

- › Conforms to IEC 61439-1 & 3
- › IK 09-for double door DBs
- › Available in CRCA sheet steel, RAL 9003, powder coated
- › Ready to use DBs - neutral bar/s with shroud/s | earth bar/s | sticking saddles | cement spill protector | cable ties | circuit identification labels
- › With provision to mount modular devices as per requirement



Description	No. of Modules Per Row	Cat. Nos.	M.R.P. (₹) Per Unit
IP 43 - Metal Door			
2 Row 28 Module	14	DEROW228DD	8810
3 Row 42 Module	14	DEROW342DD	10560
4 Row 56 Module	14	DEROW456DD	11480
4 Row 64 Module	16	DEROW464DD	13355

For ordering old DBs, replace Cat no with "DB" instead of "DE".

Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

TPN Phase Selector DB [8537]



Highlights

- Conforms to IEC 61439-1 & 3
- IK 09-for double door DBs
- Available in CRCA sheet steel, RAL 9003, powder coated
- Ready to use DBs - Provided with 3 nos. of 63A E&A rotary switches | 3 nos. of rocker switches for phase identification | 100A insulated phase bus-bars | neutral bar/s with shroud/s | set | earth bar/s | sticking saddles | color-coded interconnecting wire cable ties | blanking plates and circuit identification labels
- With provision for - FP MCB/Isolator/RCCB/RCBO as incomer and SP MCBs as outgoing



Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
	Incomer	Outgoing		
IP 43 - Metal Door				
4 way	8	4+4+4	DEPSR004DD	21560
6 way	8	6+6+6	DEPSR006DD	21905
8 way	8	8+8+8	DEPSR008DD	23465
10 way	8	10+10+10	DEPSR010DD	25315
12 way	8	12+12+12	DEPSR012DD	26690

EV charging DB 8537]



Highlights

- Engineered specifically Charging application - 3.3 kW
- Robust earth leakage, short circuit and overload protection with RCBO-
- Factory fitted RCBO, switch and socket



Description	No. of Modules	Cat. Nos.	M.R.P. (₹) Per Unit
2 way EVDB	2	DEEVC002LD	*
4 way EVDB	4	DEEVC004LD	*

* For details, please contact nearest branch office

Enclosure [8537]



Highlights

- Conforms to IEC 61439-1 & 3
- Suitable for Surface and Flush mounting
- Available in CRCA sheet steel, RAL9003, powder coated
- With provision to mount MCB/Isolator/RCCB/RCBO and other modular devices



IP 30 - Metal Door

Description	No. of Modules	Cat. Nos.	M.R.P. (₹) Per Unit
IP 30 - Metal Door			
2 way	2	DEENC002SD	1095
3 way	3	DEENC003SD	1095
4 way	4	DEENC004SD	1095
6 way	6	DEENC006SD	1700

For ordering old DBs, replace Cat no with "DB" instead of "DE".

Eq. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

Plug & Socket DB [8537]



Highlights

- Conforms to IEC 61439-1 & 3
- Suitable for Surface and Flush mounting
- Available in CRCA sheet steel, RAL9003, powder coated
- Loose Metal Plugs & Sockets conforms to IS 8804; available in Single Phase & Three Phase



Metal Plug & Socket

Plastic Plug & Socket

Description	No. of Pins	No. of Modules	Cat. Nos.	M.R.P. (₹) Per Unit
Metal Plug & Sockets				
10 A, 2 Pin + SC ^A	P + N	1	DEMPS110SD	2725
20 A, 2 Pin + SC ^A	P + N	1	DEMPS120SD	2930
20 A, 2 Pin + SC ^A	P + N	2	DEMPS220SD	3175
20 A, 3 Pin + SC ^A	3P	3	DEMPS320SD	5380
32 A, 3 Pin + SC ^A	3P	3	DEMPS332SD	6370
32 A, 3 Pin + SC ^A	3P	4	DEMPS432SD	6775
63 A, 5 Pin + SC ^A	3P+N+E	4	DEMPS463SD	22955
Plastic Plug & Sockets				
16 A, 3 Pin	P+N+E	2	DEPPS316SD	4455
32 A, 3 Pin	P+N+E	4	DEPPS332SD	4805
32 A, 5 Pin	3P+N+E	8	DEPPS532SD	8025
63 A, 5 Pin	3P+N+E	8	DEPPS563SD	20120

Metal Plug [8536]



Description	No. of Pins	Cat. Nos.	M.R.P. (₹) Per Unit
10 A, 2 Pin + SC ^A	P + N	MPS210P	335
20 A, 2 Pin + SC ^A	P + N	MPS220P	355
20 A, 3 Pin + SC ^A	3P	MPS320P	475
32 A, 3 Pin + SC ^A	3P	MPS332P	900

Note: Standard pack quantity - 20 nos.

Metal Socket [8536]



Description	No. of Pins	Cat. Nos.	M.R.P. (₹) Per Unit
10 A, 2 Pin + SC ^A	P + N	MPS210S	350
20 A, 2 Pin + SC ^A	P + N	MPS220S	390
20 A, 3 Pin + SC ^A	3P	MPS320S	530
32 A, 3 Pin + SC ^A	3P	MPS332S	900

^A SC-Scraping Earth

Note: Standard pack quantity - 20 nos.

DBs with provision for TV / Telephone splitters [8537]

New

Highlights

- › Distribution Boards equipped with provisions to mount TV / Telephone splitters
- › Available in SPN & TPN DBs
- › Communication DB equipped with provisions to mount 2 ONT, Spike guard, Data switch, TV / Telephone splitters



TV / Telephone



Communication DB

Cable End Boxes [8537]

Highlights

- › Available in CRCA sheet steel, RAL9003, powder coated
- › Can be either at the top or bottom of the distribution board

Description	Cat. Nos.	M.R.P. (₹) Per Unit
CEB for SPN DBs		
CEB-SPN Double Door, 4 way	DESPN004CBS	1200
CEB-SPN Double Door, 6 way	DESPN006CBS	1295
CEB-SPN Double Door, 8 way	DESPN008CBS	1450
CEB-SPN Double Door, 12 way	DESPN012CBS	1610
CEB-SPN Double Door, 16 way	DESPN016CBS	2270
CEB-SPN Double Door, 18 way	DESPN018CBS	2340
CEB for TPN DBs		
CEB-TPE Double Door, 4 way	DETPE004CBS	1555
CEB-TPE Double Door, 6 way	DETPE006CBS	2215
CEB-TPN Double Door, 4 way	DETPN004CBS	1630
CEB-TPN Double Door, 6 way	DETPN006CBS	2285
CEB-TPN Double Door, 8 way	DETPN008CBS	2870
CEB-TPN Double Door, 12 way	DETPN012CBS	4780
CEB-TPN Double Door, 16 way	DETPN016CBS	4825
CEB for Horizontal PPI DBs		
CEB-Horz. PPI Double Door, 4 way	DEHPI004CB	2410
CEB-Horz. PPI Double Door, 6 way	DEHPI006CB	3010
CEB-Horz. PPI Double Door, 8 way	DEHPI008CB	3775
CEB-Horz. PPI Double Door, 12 way	DEHPI012CB	4735
CEB-Horz. PPI Double Door, 16 way	DEHPI016CB	5150
CEB for VTPN DBs		
CEB-VTPN Double Door, Modular Incomer	DEVTMXXCB	1610
CEB-VTPN Double Door, MCCB Incomer	DEVTXXXXCB	5690
CEB for Phase Segregated DBs		
CEB-PSG Double Door, 4 way	DEPSG004CB	4225
CEB-PSG Double Door, 6 way	DEPSG006CB	5035
CEB-PSG Double Door, 8 way	DEPSG008CB	5560
CEB-PSG Double Door, 12 way	DEPSG012CB	6190

DB Type	Description	No. of Modules		Cat. Nos.	M.R.P. (₹) Per Unit
		Incomer + Outgoing			
IP 43 - Metal Door					
SPN	6 way	2	4	DESPN006DDTV	6125
	8 way	2	6	DESPN008DDTV	6590
	12 way	2	10	DESPN012DDTV	8105
	16 way	2	14	DESPN016DDTV	9410
	18 way	2	16	DESPN018DDTV	11125
TPN	4 way	8	4+4+4	DETPN004DDTV	12045
	6 way	8	6+6+6	DETPN006DDTV	13920
	8 way	8	8+8+8	DETPN008DDTV	16590
Communication DB				DECOM01DD	*

* For details, please contact nearest branch office

DB Accessories

Busbar - Fork Type [8538]

Highlights

- › Available in Single Pole, Double Pole, Three Pole and Four Pole versions
- › Material : Copper



Description	Cat. Nos..	M.R.P. (₹) Per Unit	Std. Pack Qty.
SP 13 Mod	BSP13	535	5
SP 56 Mod	BSP56	2200	5
DP 12 Mod	BDP12	955	5
TP 12 Mod	BTP12	1035	5
FP 12 Mod	BFP12	2040	5
End Caps for SP	ECP01	35	10
End Caps for DP/TP	ECP03	75	10
End Caps for FP	ECP04	120	10



Blanking Plates [8538]

Highlights

- › Available in One module and Half module

Description	Cat. Nos.	M.R.P. (₹) Per Unit	Std. Pack Qty.
One Module	BKP10	35	10
Half Module	BKP05	35	10



PDK02

Padlock [8301]

Highlights

- › Version with standard lock and a common key

Description	Cat. Nos.	M.R.P. (₹) Per Unit	Std. Pack Qty.
Lock and Key Kit	PDK02	935	5

For ordering old DBs, replace Cat no with "DB" instead of "DE".

Eg. - New DB Cat no for SPN 12W DD - DESPN012DDS, Old DB Cat no for same will be DBSPN012DDS. Old DBs are available till stock last.

General Terms

All prices are on Maximum retail price basis inclusive of all duties, GST & any other tax as applicable.

Warranty Policy

All products listed in the price list are covered by a warranty against manufacturing defects for a period of 18* months from the date of purchase. For Lauritz Knudsen MCBs & Isolators mounted inside Lauritz Knudsen Distribution Boards, an extended warranty of 5 years is provided.

In the event of a defect due to faulty workmanship or other associated reasons, we will, at our discretion, remedy the defect or replace the faulty parts or the entire product as soon as possible, free of cost.

However, the warranty is subject to proper usage, efficient maintenance, and does not cover defects arising from fire, accidents, inefficient maintenance, faulty operation, or deliberate or accidental damage. It also does not cover damage to power electronic components such as thyristors & IGBTs, which primarily fail due to overtemperature & over-voltage. Users need to take adequate precautions to eliminate these conditions. Manufacturer shall not be responsible & liable for any special, incidental, social or consequential (including lost profits) loss, consequential damages, injury or damages (punitive) of any kind solely attributable to defect or failure of its products. Manufacturer shall not be liable in any manner for the issue of or failure in the performance of other equipment the product is attached to.

Comprehensive Service Support

Lauritz Knudsen Electrical & Automation has over seven decades of experience in providing after sales service for low voltage distribution system in every type of industry & commercial complex in India

Lauritz Knudsen Electrical & Automation offers the following services, partnering you in your maintenance of low voltage distribution products:

- › Regular Maintenance
- › Preventive Maintenance Programme
- › On Call
- › Annual Maintenance Contract
- › Product Support for Managing Obsolescence-

Switchgear Training Centres



Pune

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
T-156 / 157, MIDC,
Bhosari, Pune - 411 026
Tel: 020-2712 0037 / 2712 0653
E-mail: STC-PUNE@LK-EA.com



Lucknow

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
C-6 & 7, UPSIDC,
P. O. Sarojininagar,
Lucknow - 226 008
Tel: 97944 54455
E-mail: STC-LUCKNOW@LK-EA.com



Delhi

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
A-25, Imperia Complex, First Floor
Mohan Cooperative Industrial Estate
Near Sarita Vihar / Mohan Estate Metro Station
Main Mathura Road, New Delhi - 110044
Tel: 9899020306 / 9720186726 / 9560845094
E-mail: STC-DELHI@LK-EA.com



Kolkata

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre,
2nd Floor, Block BN3, Sector V,
Salt Lake City,
Kolkata - 700091, West Bengal
Tel: 7738717893 / 7797795567
E-mail: STC-KOLKATA@LK-EA.com



Vadodara

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Behind L&T Knowledge City,
Near Village Ankhol,
Vadodara - 390019
Tel: 0265 6147805 / 6147808
E-mail: STC-VADODARA@LK-EA.com



Coonor

Lauritz Knudsen Electrical & Automation
Switchgear Training Centre
Ooty-Coonoor Main Road
Yellanahalli P.O.,
The Nilgiris - 643 243
Tel: 0423 251 7107
E-mail: STC-COONOOR@LK-EA.com

Electrical Standard Products (ESP) Offices

HEAD OFFICE

Lauritz Knudsen Electrical & Automation, A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra.

Tel: 022-6722 6300 | Fax: 022-6705 1112 | e-mail: CIC@LK-EA.com

BRANCH OFFICES

Lauritz Knudsen Electrical & Automation
C-201, The First Commercial Complex,
B/S Keshavbaug Party Plot, Vastrapur,
Ahmedabad - 380 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Shri Daneshwari, 1st Floor,
Plot No. 17, 2nd Cross, Near Old Income
Tax Office Road, Vidyanagar,
Hubballi - 580 021
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
No.10, Fortuna Towers, 2nd Floor,
Rana Pratap Marg, Near NBRI,
Lucknow - 226 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A06/A07, Second Floor,
Grand Chandra Complex, Frazer Road
Patna - 800 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Wework Central, #36 Infantry Road,
Bengaluru - 560 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
AWFIS Space Solutions, Prestige Phoenix,
4th floor, 1405, Umanagar, Begumpet,
Hyderabad - 500 016
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
El Dorado Building, 3rd Floor, 6,
Venkatraman Street, Chinna Chokkikulam,
Madurai - 625 002
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
UrbanWrk, 5th Floor, Sai Radhe,
Raja Bahadur Mill Road, Behind Hotel
Grand Sheraton, Sangamwadi
Pune - 411 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Work loop Unit-612, 6th Floor,
Esplanade One, Rasulgarh,
Bhubaneswar - 751 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Workie, 214 - 2nd Floor,
Apollo Premier, PU-4,
Scheme No. 54, Vijay Nagar Square,
Indore - 452 010
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Bestech Business Park,
Tower - A, 2nd floor, Sector - 66
Mohali - 160059
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 211 & 212, Pithalia Plaza,
KK Road, Near Fafadih Chowk,
Raipur - 492 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
801 Word Level-8, No. 28,
SIDCO Industrial Estate, Guindy,
Chennai - 600 032
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Office No. 430, 4th Floor,
Jaipur Electronic Market, Riddhi Siddhi,
Gopalpura Bypass,
Jaipur - 302 018
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
TC II, Tower B, PRIMA BAY Gate No. 5,
Saki Vihar Road Powai,
Mumbai - 400 072
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
DevX 4th Floor, A Wing, Om 9 Square,
150 Ft Ring Road, Near Nana Mava Circle,
Opp Silver Heights,
Rajkot - 360 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Playworkz Coworking Space
43 & 44, 3rd Cross,
Bharathy Colony, Peelamedu,
Coimbatore - 641 004
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
GDR Siddha, Ground Floor, N Road
Bistupur, Opposite St. Mary's Church,
Jamshedpur - 831 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Unnati Building, 2nd Floor,
Automation Campus, A-600, TTC Industrial
Area Shil-Mahape Road, Mahape,
Navi Mumbai - 400 710
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
10th Floor, Titaanium Business,
Bhimrad Road, Althan
Surat - 395 017
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
3rd Floor, 1&2 Vijay Park,
Main Chakrata Road, Opp. Anandam,
Near Ballapur chowk,
Dehradun - 248 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Business Communication Centre
2nd Floor, Chiramel Chambers,
Kurusipally Road, Ravipuram,
Kochi - 682 015
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
M1 & M2, Mezzanine Floor,
Himalaya Excellency,
Plot No. C-47, Pratap Nagar Square,
Nagpur - 440 022
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
11th Floor, Block-D, Notus IT Park,
Sarabhai Campus, Bhailal Amin Marg,
Vadodara - 390 023
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Ground Floor, B-27,
Biplab Rashbihari Sarani,
Sector 2A, Bidhan Nagar,
Durgapur - 713 212
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz & Knudsen Electrical & Automation
207, 2nd floor, Revolution Complex,
Station Road, E Ward,
Next to Pedestrian Bridge,
Kolhapur - 416 001
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, Samarth House,
Opposite Titan World,
Samarth Nagar, Mahatma Nagar,
Nasik - 422 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
Qubexpro Business Centre,
4th Floor, V Mall, Above Lifestyles,
Facor Layout, Waltair Uplands,
Visakhapatnam - 530 003
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
6th Floor, Exotica Greens, A Block, 191,
R G Baruah Road, Guwahati Central,
Guwahati - 781 005
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
2nd Floor, BN3, Salt Lake, Sector-V,
Kolkata - 700 091
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Lauritz Knudsen Electrical & Automation
A-25, 1st Floor, Imperia Complex,
Mohan Corporative Industrial Estate,
Near Sarita Vihar Metro Station,
Mathura Road,
New Delhi - 110 044
Phone No: 022-6932 7800
e-mail: CIC@LK-EA.com

Product improvement is a continuous process. For the latest information and special application, please contact any of our offices listed here. Product photographs shown for representative purpose only.



Lauritz Knudsen Electrical & Automation, Electrical Standard Product

A/600, Shil-Mahape Road, TTC Industrial Area, MIDC Thane, Navi Mumbai, 400 710, Maharashtra, Phone No: 022-6722 6300 | Web: www.LK-EA.com

Customer Interaction Center (CIC)

Phone no: 022-6932 7800

Web: www.LK-EA.com | e-mail: CIC@LK-EA.com